



PRODUCT GUIDE

WWW.ANTHONYLIFTGATES.COM

ANTHONY LIFTGATES, INC.®

CONTENT

Selecting a Liftgate

- 07 Application Guide
- 08 Platform and Ride Type
- 09 Liftgates by Vehicle Application
- 11 Liftgates by Model Type

TuckUnder™ Series Liftgates

- 15 ETU Models
- 17 AST Models
- 19 SM Models
- 21 ATU-GLR Models
- 23 DCT Models
- 25 MTU Models

RailTrac® Series Liftgates

- 29 AR Models
- 31 AR-FA Models
- 32 AR-DT Models
- 33 PCR Models
- 35 MRT Models
- 37 MRT-SL Models
- 38 MRT-GB Models


Pickup, Van, & Utility Body Series

- 41 ALB Models
- 43 LA Models

Conventional Series

45 AC Models



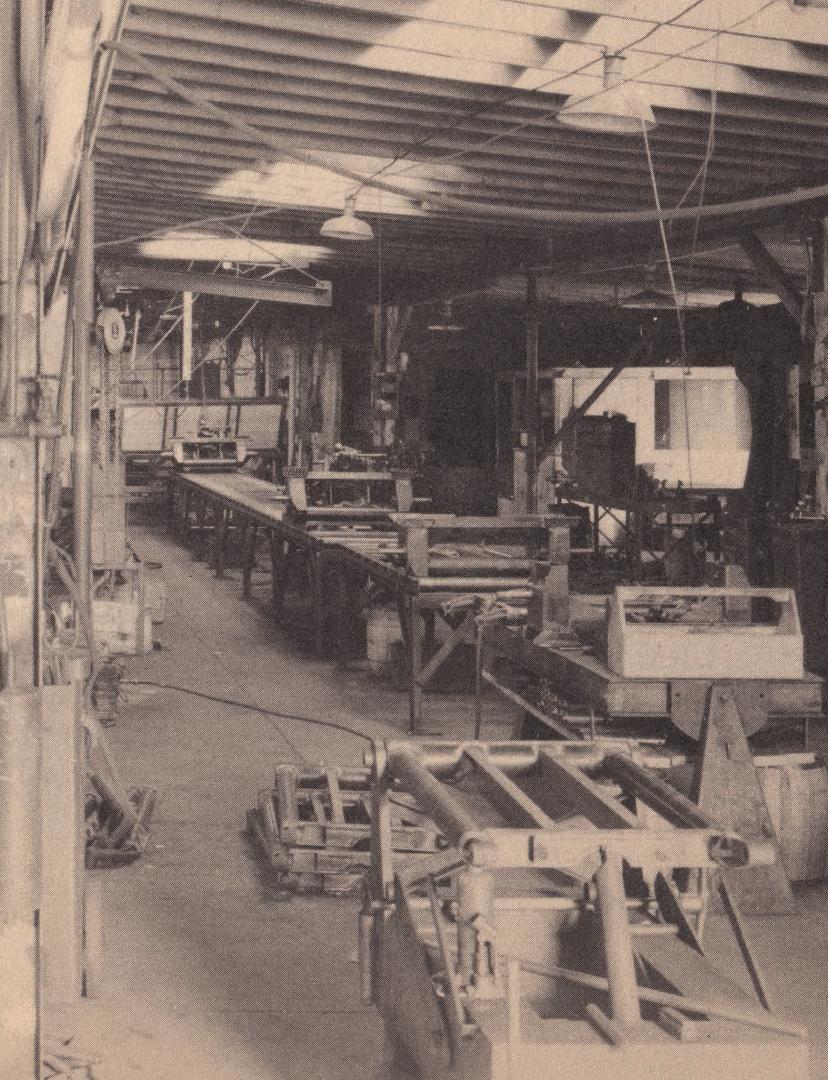

ANTHONY IFT GATE HYDRAULIC



OVER 75 YEARS


OF AMERICAN INNOVATION

William C. Anthony founded the Anthony Company in 1917 with his invention of a gravity type dump box for the Ford Model T. Its success marked the beginning of a long legacy of innovative trucking products.

Anthony introduced the first liftgate, revolutionizing the way goods moved worldwide in 1941.

For over 75 years, Anthony Liftgates have been leading the way with innovative products for trucks of all sizes.

Today, every Anthony gate is still precision crafted in the USA - just down the road from where the first liftgate was born.

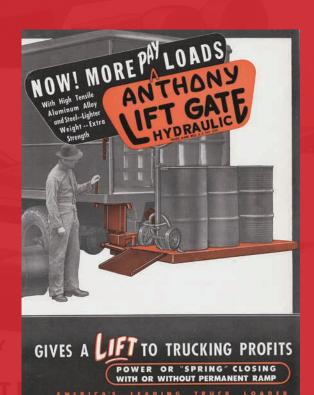

ANTHONY CO., INC., s



TOUGH

Life on the back of a truck isn't easy. Whether it's the pavement, the cargo, the dock, or the weather, there's always something trying to stop your truck from moving. Every Anthony gate is built for work in the real world.

DRIVER FRIENDLY

Anthony liftgates are easy to use. Spring-assisted platforms are tuned to make platform operation a breeze. A huge selection of options provide a safe and efficient lift for every kind of cargo.

LOW MAINTENANCE

Anthony liftgates use advanced anti-wear materials and are designed to lift at lower pressures. This means an Anthony liftgate runs longer with less time and money wasted on maintenance and repair.

RELIABLE

Liftgates should solve problems, not create them, so Anthony gates use only top-quality components. Plus, every liftgate must pass a grueling cycle test before it is ready to wear the Anthony badge: Thousands of cycles. Maximum capacity. Not one drop of grease.

ALL-AMERICAN SUPPORT

Because Anthony gates are designed, built, sold, and supported from America's heartland, there's never a worry about ports, borders, or overseas customer support when your truck is down. An Anthony gate means a commitment to support for the long haul, when you need it.

APPLICATION GUIDE

	Available Liftgates Ca	pacity Range (LB)		
	Light Duty Vehicle	Medium Duty Vehicle	Heavy Duty Vehicle	
	GVW 14,000 lbs or less	GVW 14,001-26,000 lbs	GVW 26,001 +	Ride Type
TUCKUNDER™				
ETU	2000-2500	2000-2500		Standard Ramping
AST	1500-3500	1500-3500		Standard Ramping
AST-Plus	2500-3000	2500-3000		Standard Ramping
ATU-GLR		2500-3000		Gentle Level Ride
DCT		2500-3300		Standard Ramping
DCT-WR		2500-3300		Standard Ramping
SM		1800-3000	1800-3000	Standard Ramping
MAGNUM TUCI	KUNDER™			
MTU-GLR		2500-6000	2500-6000	Gentle Level Ride
MTU-GLR-EX		3000-4000	3000-4000	Gentle Level Ride
MTU-GLR-WR		3000-4000	3000-4000	Gentle Level Ride
RAILTRAC®				
AR	1200-2500	1200-2500		Full Level Ride
AR-RT	1800-2500	1800-2500		Full Level Ride
AR-DT	1200-1800	1200-1800		Full Level Ride
HCR	3000	3000		Full Level Ride
PCR	1800-2500	1800-2500		Full Level Ride
PCR-HC	3000	3000		Full Level Ride
MAGNUM RAIL	TRAC®			
MRT		3500-6500	3500-6500	Full Level Ride
MRT-SLR		3500-5500	3500-5500	Full Level Ride
GAS BOTTLE R	AILTRAC®			
PCR-GB		2500	2500	Full Level Ride
MRT-GB		3500-4500	3500-4500	Full Level Ride
PICKUP, VAN,	AND UTILITY BODY			
ALB	1500	1500		Full Level Ride
LA	1600-2000	1600-2000		Full Level Ride
CONVENTIONA	L			
AC	1600-2500	1600-2500		Standard Ramping

SELECTING PLATFORM AND RIDE TYPE

Α

Platform Main Section

Platform Flip Section

Rear

C Ramp


Platform Dimensions

- A Load Area Width
- B Load Area Depth
- C Ramp Depth



Cart stops optional on most platforms

Ramp Types



Ramped Platform
Flat Surface with Rear Ramp



Wedge Platform Full Taper Front to Back



ARR Platform3-Position Pivoting Ramp

Ride Types



Standard Ramping RideGradual tilt throughout ride




GLR- Gentle Level Ride™Level ride with ground level tilt



Full Level Ride
Remains level throughout the cycle

LIFTGATE OVERVIEW

BY COMMON VEHICLE APPLICATION

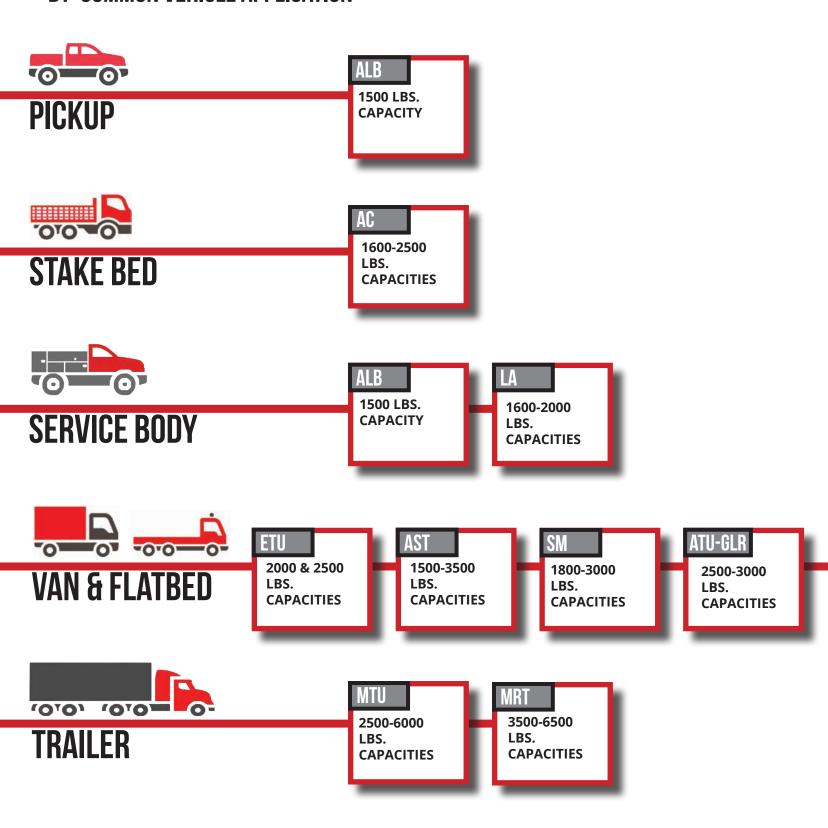





Installations not strictly limited to those presented here. Call 800-482-0003 for additional information.



LIFTGATE OVERVIEW


BY MODEL TYPE

RAILTRAC®

RailTrac® models mount to the rear frame of a truck or trailer. They move straight up and down, providing a level ride cycle that runs aligned with the truck bed at all times. When stowed, the platform typically covers a portion of the rear doorway. Many models have platforms that may be lowered straight down to provide access to the doorway, or for dock loading.

RailTrac® Series models are chain-driven liftgates suited for light & medium duty trucks. They can be installed on van bodies, flat beds, and stake beds. They are well-suited for low bed height vehicles in need of a large platform, but are not recommended for use in trailer applications.


Magnum RailTrac® Series models are direct hydraulic drive liftgates built for both truck and trailer use. They work well in dock loading, pallet delivery, and wheeled cart delivery, and are commonly used to move laundry, auto parts, food, beverages, batteries, bottled gas, and merchandise.



TUCKUNDERTM

Tuckunder liftgates mount to the chassis frame of a truck or trailer. They stow folded beneath the rear of the vehicle to provide full access to the rear doorway when not in use.

Anthony offers a broad range of TuckUnder $^{\text{TM}}$ models for use on light, medium, and heavy duty vehicles in two different ride styles to suit virtually every application.



CONVENTIONAL

Conventional liftgates mount to the chassis frame of a truck. They stow upright at the rear of the vehicle, doubling as a tail gate when not in use.

These models are commonly used on stake bed trucks in construction and landscaping applications.






UTILITY

Anthony's utility liftgates mount to the vertical posts and rear edge of a truck. They stow upright at the rear of the vehicles, doubling as a tail gate when not in use.

Utility liftgates make pickups and service body vehicles more versatile, and are valuable in a wide number of applications including roadside tire repair, painting, construction, maintenance, and landscaping.







ETU TUCKUNDER™



The ETU (Express TuckUnder™) is the perfect solution for value-minded vehicles. It features the same unique grease free technology used in other Anthony models, and large wedge platforms with full spring assist for easy operation. Plus, with a set of bumper steps, mechanical latch, and factory-filled power unit housed in a rugged galvanized steel enclosure, the ETU is a fantastic value.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY





ETU MODELS

ETU-20-44

A 2,000 pound capacity TuckUnder[™] for smaller trucks and lower bed heights.

ETU-25-50

A 2,500 pound capacity TuckUnder[™] for larger trucks and higher bed heights.

PERSONAL CUSTOMER SUPPORT


Need heln?

From a fleet of one...to a fleet of thousands...at Anthony, every truck matters. No automated phone systems. Just prompt, expert help when you need it.






STANDARD MODELS		
MODEL	ETU-20-44	ETU-25-50
Capacity (lbs.)	2000	2500
Bed Height (Min-Max)	36" - 44"	38" - 56"
Platforms	80" x 44" Wedge	80" x 50" Wedge

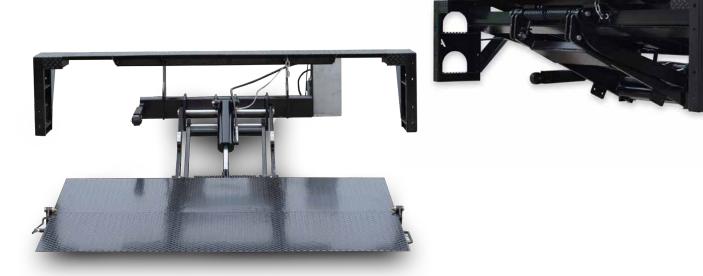

AST TUCKUNDER™

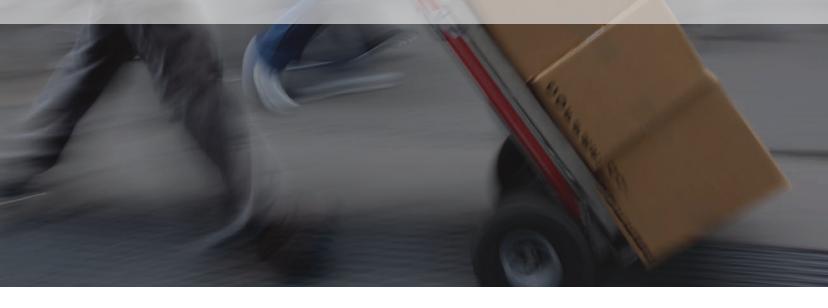

With its simple, rock-solid design, AST (Anthony Standard Tuck) has been the perfect choice for delivery in light and medium truck applications for over 30 years.

Every AST model is packed with quality features purpose-built to deliver years of low maintenance operation. Plus, with a huge selection of available platforms, capacities, and clever options, AST is equipped for the job.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY





AST MODELS

AST

Available in five capacities from 1500 to 3500 lbs. with a choice of platform styles.

AST-L

With a low-profile floor extension and compact wedge platform, AST-L is designed to fit low bed heights.

AST-PLUS

The most popular AST configurations with a low-profile floor extension for added bed height range. Always in stock, AST-Plus is the quick-quote go-to.

GREASE FREE

In 1993, we set out to develop a liftgate that didn't require grease to save a leasing partner time and money. The result was our unique grease free bushing technology.

Often imitated, never equalled, these advanced grease free bushings are part of what makes an Anthony more reliable with less maintenance.





STANDARD MODELS						
MODEL	AST-1500	AST-2000	AST-2500	AST-3000	AST-3500	
Capacity (lbs.)	1500	2000	2500	3000	3500	
Bed Height (Min-Max)	42" - 57"	42" - 57"	42" - 57"	42" - 57"	42" - 57"	
AVAILABLE PLATFORMS						
Steel or Aluminum 80" x	Steel or Aluminum 80" x 38" + 5" Ramped					

Steel or Aluminum 80" x 45" + 6" Ramped

Steel or Aluminum 80" x 50" Wedge

Steel or Aluminum 80" x 48" + 12" ARR

LOW BED MODELS			
MODEL	AST-L-1800	AST-L-2500	
Capacity (lbs.)	1800	2500	
Bed Height (Min-Max)	36" - 44"	36" - 44"	
AVAILABLE PLATFORMS			

Steel or Aluminum 80" x 44" Wedge

ADDED BED HEIGHT RANGE MODELS				
MODEL	AST-PLUS-2500	AST-PLUS-3000		
Capacity (lbs.)	2500	3000		
Bed Height (Min-Max)	38" - 56"	38" - 56"		
AVAILABLE DLATEORM	AVAILABLE DI ATEODMS			

Steel or Aluminum 80" x 50" Wedge

Cart stops available on any wedge platform

For mounting requirements, visit anthonyliftgates.com/mountingrequirements

SM TUCKUNDER™



Anthony SM (Side Mount) Series liftgates feature all the low-maintenance features of the AST Series, designed for mount on the side of a truck.

With its side-mounted position and compact size, SM is ideal for offloading smaller cargo directly to a curb. Available level ride cams help to stabilize top heavy cargo such as milk crates, making SM a great fit for dairy delivery.

RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY





THE LATEST MANUFACTURING TECHNOLOGY

With the latest manufacturing technology and an experienced midwestern workforce, every liftgate takes shape from raw material to finished product under one roof.

That means better quality control, quicker responses to customers, and a product that is simply built to a higher standard.





KEY ADVANTAGES

- Stainless Steel Pump Box
- Heavy Duty Transit Latch
- Low Pressure Hydraulics
- Grease Free



STANDARD MODELS			
MODEL	SM-1800	SM-2500	SM-3000
Capacity (lbs.)	1800	2500	3000
Bed Height (Min-Max)	42" - 57"	42" - 57"	42" - 57"
$\Delta V/\Delta U/\Delta DU \Gamma/DU/\Delta T \Gamma \cap DM$	C		

AVAILABLE PLATFORMS

Steel 48" x 34" + 7" Ramped

Steel 72" x 38" + 5" Ramped

For mounting requirements, visit anthonyliftgates.com/mountingrequirements







ATU-GLR (Anthony TuckUnder™ with Gentle Level Ride™) is a rock-solid TuckUnder™ designed to offer premium level ride in a more compact package than full size models like MTU-GLR.

A choice of wedge and ARR platforms provide plenty of room for a variety of cargo. Grease free operation eliminates the expense of routine lubrication. Plus, ATU-GLR's Gentle Level Ride™ feature delivers versatility and increased stability for top-heavy loads.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY





BUILT TO A HIGHER STANDARDQuality is priority #1, so every Anthony gate is built to a higher standard.

High-strength steel construction, advanced anti-wear materials, waterproof switches, premium power packs, and industry-leading corrosion resistance put Anthony in a class all its own.





STANDARD MODELS		
MODEL	ATU-GLR-25	ATU-GLR-30
Capacity (lbs.)	2500	3000
Bed Height (Min-Max)	42" - 55"	42" - 55"

AVAILABLE PLATFORMS


Steel or Aluminum 80" x 50" Wedge

Steel or Aluminum 80" x 48" + 12" ARR

Cart stops available on any wedge platform

 $For mounting \ requirements, \ visit \ anthony lift gates. com/mounting requirements$



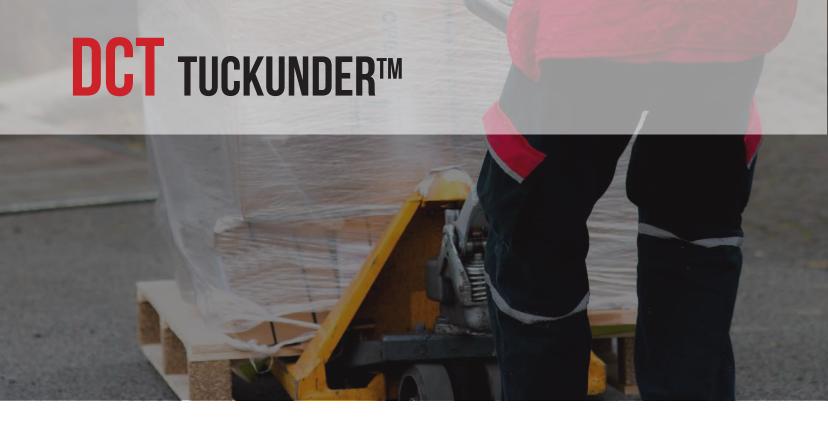

The ALL NEW DCT (Dual Cylinder TuckUnder™) series is the ultimate combination of simplicity and utility for medium duty trucks. It is easy to install, a breeze to use, and incredibly simple to maintain.

DCT's mid-arm, dual-cylinder design makes for a strong, stable lift. Its straightforward, ramp-ride design and grease free operation keep moving parts and maintenance expenses to a minimum. And with a choice of large wedge platforms, DCT has plenty of working space to handle a variety of cargo.

RECOMMENDED APPLICATIONS

MEDIUM DUTY





DCT MODELS

DCT

Standard DCT models with a choice of large wedge platforms in two popular capacities.

DCT-WR

A walk ramp ready DCT, designed to allow access to a walk ramp without lowering the liftgate from the stowed position.

TESTED TOUGH

Before it's allowed to wear the Anthony badge, every liftgate must endure a grueling endurance test. DCT was subjected to 100,000 cycles at maximum capacity without one drop of grease. The result? Zero failure and no visible signs of wear to critical pivot points.

That's just one example of how an Anthony liftgate is built to outlast the rest.



DCT-33 Endurance Test



STANDARD MODELS		
MODEL	DCT-25	DCT-33
Capacity (lbs.)	2500	3300
BED HEIGHT (Min-Max)		
50" Platform	42" - 57"	42" - 57"
60" Platform	47" - 57"	47" - 57"
AVAILABLE PLATFORMS		

Steel or Aluminum 86" x 50" Wedge

Aluminum 86" x 60" Wedge

WALK RAMP MODELS		
MODEL	DCT-WR-25	DCT-WR-33
Capacity (lbs.)	2500	3300
BED HEIGHT (Min-Max)		
50" Platform	46" - 57"	46" - 57"
60" Platform	49" - 57"	49" - 57"
AVAILABLE PLATFORMS		


Steel or Aluminum 86" x 50" Wedge

Aluminum 86" x 60" Wedge

Cart stops available on any wedge platform

For mounting requirements, visit anthonyliftgates.com/mountingrequirements

MTU TUCKUNDER™

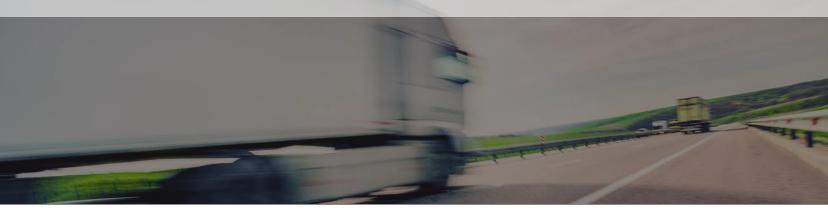

MTU-GLR (Magnum TuckUnder™ with Gentle Level Ride™) is the commercial-duty TuckUnder™ for fleets that demand the best. Its high-strength T1 steel arms and twin-cylinder drive form a strong, stable lift. Grease free operation eliminates the expense of routine lubrication. Plus, MTU's Gentle Level Ride™ delivers added versatility and increased stability for top-heavy loads.

MTU's ground contact rollers help protect the liftgate and the pavement from vehicle movement, and its standard power down operation means consistent cycle times in all weather conditions. Plus, with a string of available options engineered for the unique needs of class 8 users, MTU is at home on both straight trucks and trailers.

RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY







MTU MODELS

MTU-GLR

The core of the MTU line, with a large selection of capacities and platforms, well-suited to a wide variety of medium and heavy duty trucks and trailers.

MTU-GLR-EX

Extended arms and a deeper floor extension allow the "EX" to stow tighter and reach around the thicker sills of refrigerated bodies and trailers.

MTU-GLR-WR

The walk ramp ready MTU includes provisions to allow full access to a walk ramp without the need to lower the liftgate from the stowed position.

GENTLE LEVEL RIDE

Smooth, level up/down operation. Platform tilts gently at ground and re-levels before lifting cycle begins.





STANDARD MODELS					
MODEL	MTU-GLR-25	MTU-GLR-3	MTU-GLR-4	MTU-GLR-5	MTU-GLR-6
Capacity (lbs.)	2500	3000	4000	5000	6000
Bed Height (Min-Max)	47" - 57"	47" - 57"	47" - 57"	47" - 57"	47" - 57"

AVAILABLE PLATFORMS

Steel Main/Aluminum Flip or Aluminum 80" x 60" Wedge

WALK RAMP MODELS	;	
MODEL	MTU-GLR-WR-3	MTU-GLR-WR-4
Capacity (lbs.)	3000	4000
Bed Height (Min-Max)	49" - 57"	49" - 57"
AVAILADLE DLATEODM	<u></u>	

AVAILABLE PLATFORMS

Aluminum 80" x 60" Wedge

EXTENDED MODELS			
MODEL	MTU-GLR-EX-3	MTU-GLR-EX-4	
Capacity (lbs.)	3000	4000	
Bed Height (Min-Max)	47" - 57"	47" - 57"	
AVAILABLE PLATFORM	IS		

Aluminum 80" x 60" Wedge

Cart stops available on any wedge platform. 84" wide platform available For mounting requirements, visit anthonyliftgates.com/mountingrequirements







AR (Anthony RailTrac®) is a classic medium rail liftgate, with spring- assisted platform operation and an extensive list of available configurations.

Its durable roller chain drive allows all hydraulic components to be guarded safely within the liftgate housing. Lift cycle friction is minimized by advanced anti-wear pads which eliminate the need to lubricate or replace rollers, common in competitive models. Plus, AR offers a huge variety of steel and aluminum platforms, and three corrosion resistance finishes, including stainless steel.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY





MARINE DUTY CONTROLS

Inside every Anthony toggle control is a premium-quality, IP-67 rated, stainless steel switch. Its terminals are fully encased in a thick epoxy coating which guards against dust, moisture intrusion, and loose electrical connections that can lead to unwelcome downtime.





STANDARD MODELS				
MODEL	AR-1200	AR-1800	AR-2000	AR-2500
Capacity (lbs.)	1200	1800	2000	2500
Bed Height (Min-Max)	28" - 58"	28" - 58"	28" - 58"	28" - 58"
MODEL WIDTH PLATFORM WIDTH				
90" (92" Body)		86"		
94" (96" Body)		90"		
100" (102" Body)		96"		
AVAILABLE PLATFORMS				
Single Piece Steel 36" or 42" + 6" Fixed				
Single Piece Steel 36" or 42" + 12" Fixed				
Single Piece Aluminum 33", 39", 44", 50", 60" + 12" Fixed				
Single Piece Aluminum 33", 39", 44", 50", 60" + 12" ARR				

For mounting requirements, visit anthonyliftgates.com/mountingrequirements

Cart stops available on any platform

78" wide models available

AR-FA RAILTRAC®



AR-FA (Anthony RailTrac® Full Access) includes all the same low maintenance features of the AR series, but with folding 2-piece aluminum platforms. These folding platforms allow for an exceptionally large load area while still retaining full access to the rear door, even on lower bed heights. Ar-FA is the versatile choice for anyone in need of a medium rail lift.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY





KEY ADVANTAGES

- Full Rear Door Access
- Grease Free
- Low Pressure Hydraulics
- EZ Mount[™] Installation

2 YEAR WARRANTY

STANDARD MODELS				
MODEL	AR-FA-25-50-94	AR-FA-25-50-100	AR-FA-25-60-94	AR-FA-25-60-100
Capacity (lbs.)	2500	2500	2500	2500
Bed Height (Min-Max)	34" - 58"	34" - 58"	39" - 58"	39" - 58"
MODEL WIDTH	PLAT	FORM WIDTH		
90" (92" Body)	86"			
94" (96" Body)	90"			
100" (102" Body)	96"			
AVAILABLE PLATFOR	MS			

Two Piece Aluminum 50" or 60" + 12" Fixed

Platform flip is 3" narrower than main to allow for folding clearance Min bed height to allow full door access when platform folded For mounting requirements, visit anthonyliftgates.com/mountingrequirements



AR-DT with optional galvanized finish

AR-DT (Anthony RailTrac® Dump-Through) is a medium rail liftgate with all the low maintenance features of the AR series, but with a special dump-through platform which pivots to allow material to pass through the liftgate. With an AR-DT, a dump bed vehicle can do more than just haul and dump bulk materials. It can lift and lower heavy items like plants and equipment, too – a must-have for landscapers.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY





KEY ADVANTAGES

- Spring-Assist Open/Close
- Grease Free
- Low Pressure Hydraulics
- Special Dump-Through Platform



STANDARD MODELS				
MODEL	AR-1200-DT	AR-1800-DT	AR-2000-DT	
Capacity (lbs.)	1200	1800	2000	
Bed Height (Min-Max)	36" - 58"	36" - 58"	36" - 58"	
MODEL WIDTH	F	PLATFORM WIDTH		
90" (92" Body)	3	36"		
94" (96" Body)	Ġ	90"		
AVAILABLE PLATFORI	MS			

Pivoting Steel Dump-Through Platform 36" + 6"

For mounting requirements, visit anthonyliftgates.com/mountingrequirements

PCR RAILTRAC®

PCR (Power Close RailTrac®) is a classic medium rail liftgate, with the added convenience of a power open-close platform.

Its durable roller chain drive allows all hydraulic components to be guarded safely within the liftgate housing. Lift cycle friction is minimized by advanced anti-wear pads which eliminate the need to lubricate or replace rollers, common in competitive models.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY





PCR MODELS

PCR

Standard PCR models available with a selection of steel and aluminum platforms.


PCR-GB

PCR-GB is a medium duty rail lift specially designed for gas bottle delivery. It includes all the great low maintenance advantages of the PCR series, but with a unique gas bottle handling platform, built to safely handle bottled gas containers.

MADE IN THE U.S.A.

Every Anthony liftgate is precision fabricated in Pontiac, IL.



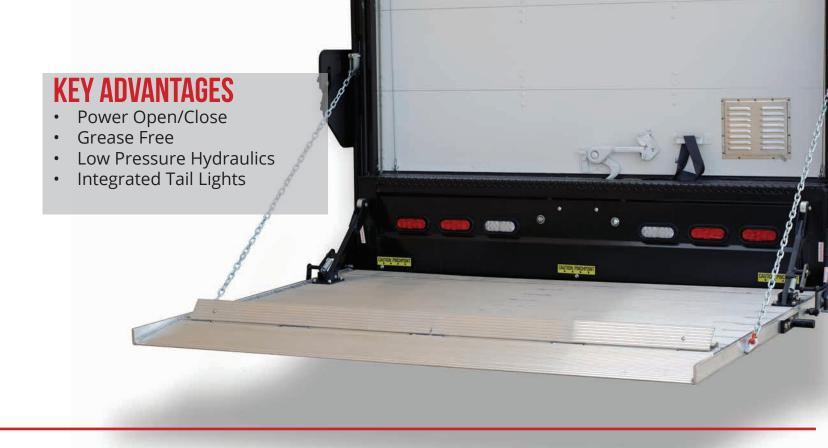

STANDARD MODELS				
PCR-1800	PCR-2500			
1800	2500			
30" - 58"	30" - 58"			
	PLATFORM WIDTH			
	90"			
	96"			
AVAILABLE PLATFORMS				
	PCR-1800 1800 30" - 58"			

2 YEAR WARRANTY

Single Piece Steel 36" or 42" + 6" Fixed

Single Piece Steel 36" or 42" + 12" ARR

Single Piece Aluminum 55" or 60" + 12" Fixed

GAS BOTTLE MODELS	
MODEL	PCR-2500-GB
Capacity (lbs.)	2500
Bed Height (Min-Max)	28" - 58"
MODEL WIDTH	PLATFORM WIDTH
94" (96" Body)	90"
100" (102" Body)	96"
AVAILABLE PLATFORM	

30" Deep Steel Bar Grate Platform + 20" Aluminum Flip Ramp and Gas Bottle Handling Rails

For mounting requirements, visit anthonyliftgates .com/mountingrequirements

MRT RAILTRAC®



MRT (Magnum RailTrac®) is a premium line of heavy duty rail lifts designed to deliver maximum performance in the most demanding applications. Whether it's delivery of auto parts, beverages, food, or any other rigorous process, MRT can help maximize uptime and minimize operating expenses.

At the heart of every MRT is its self-lubricating V-track slide system which eliminates the need for lubrication and costly roller replacement. MRT's powerful and efficient synchronized dual-motor drive system lifts at low pressures, with the added security of seamless emergency backup. LevelGuard ™ helps to prevent cylinder damage from the platform being lowered onto uneven ground.

Anthony is the industry leader in corrosion resistance, with models available in premium polymer, hot dip galvanized, or stainless steel finish. MRT has a rugged and attractive solution for every climate.

RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY







CORROSION RESISTANT FINISHES

Choose from standard Anthony premium polymer finish, or optional galvanized or stainless steel finishes.





STANDARD MODELS					
MODEL	MRT-3500	MRT-45	00	MRT-5500	MRT-6500
Capacity (lbs.)	3500	4500		5500	6500
Bed Height (Min-Max)	38" - 58"	38" - 58'	1	38" - 58"	38" - 58"
MODEL WIDTH			PLATFORM	M WIDTH	
96" Wide Model			80"		
100" Wide Model			86"		
AVAILABLE PLATFORI	MS				

Two Piece Steel 60" or 72" + 12" Pop-Up Ramp

Two Piece Steel 60" or 72" + 12" Fixed

Two Piece, Steel or Aluminum 72" or 84" + 16" ARR

Cart stops available on ramped platforms, additional platforms available For mounting requirements, visit anthonyliftgates.com/mountingrequirements

MRT-SL RAILTRAC®



KEY ADVANTAGES

- Patented 3 Side Loadable Platform
- Standard Dual motors
- Grease Free
- Low Pressure Hydraulics
- Service-Free V-Trac sliders
- Level Guard™

RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY





3 YEAR WARRANTY

STANDARD MODELS				
MODEL	MRT-SL-3500) MF	RT-SL-4500	MRT-SL-5500
Capacity (lbs.)	3500	450	00	5500
Bed Height (Min-Max)	49" - 58"	49'	" - 58"	49" - 58"
MODEL WIDTH		PLATFO	ORM WIDTH	
96" Wide Model		80"		
100" Wide Model		86"		
AVAILABLE PLATFORMS				

84" + (1) 16" Rear Ramp and (2) 30" Wide + 33.5" Deep Curb/Road Side Ramps

For mounting requirements, visit anthonyliftgates.com/mountingrequirements



KEY ADVANTAGES

- Standard Dual Motors
- Grease Free
- Low Pressure Hydraulics
- Service-Free V-Trac Sliders
- Level Guard™

RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY







STANDARD MODELS			
MODEL	MRT-GB-3500	MRT-GB-4500	
Capacity (lbs.)	3500	4500	
Bed Height (Min-Max)	38" - 58"	38" - 58"	
MODEL WIDTH	PLATFORM WIDTH		
96" Wide Model	80"		
100" Wide Model	86"		

3 YEAR WARRANTY

AVAILABLE PLATFORMS

39" Deep Steel Bar Grate Platform + 16" Aluminim Flip Ramp and Gas Bottle Handling Rails

For mounting requirements, visit anthonyliftgates.com/mountingrequirements





ALB PICKUP & UTILITY BODY



The Anthony ALB (Anthony Load Blazer) is, hands-down, the industry's toughest pickup and service body liftgate. Its dual-cylinder direct drive system lifts with no cables, plus its grease free design means years of smooth operation with no required lubrication.

ALB features an exclusive stabilizer beam which reduces side-to-side platform motion and doubles as a driver step for easy access to the truck bed. For a pickup gate that's truly built for work, there's no substitute for an Anthony ALB.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY







SIMPLY RELIABLE.


Spend more time trucking and less time maintaining your equipment.

Simple design is one of the best ways to maximize reliability. That's why Anthony liftgates are designed simple -- increased reliability and superior ease of service. In fact, many models can be serviced with nothing more than a few common hand tools.



STANDARD MODELS		
MODEL	ALB-1500-57	ALB-1500-61
Capacity (lbs.)	1500	1500
Bed Height (Min-Max)	Up to 46"	Up to 46"
AVAILABLE PLATFORMS		
Steel or Aluminum	46" x 41" + 6" Ramped	50" x 41" + 6" Ramped
Steel Bar Grate Optional tire rack available For mounting requirements, visit anthonyliftgates.c	46" x 22" om/mountingrequirements	50" x 22"

LA VAN & UTILITY BODY

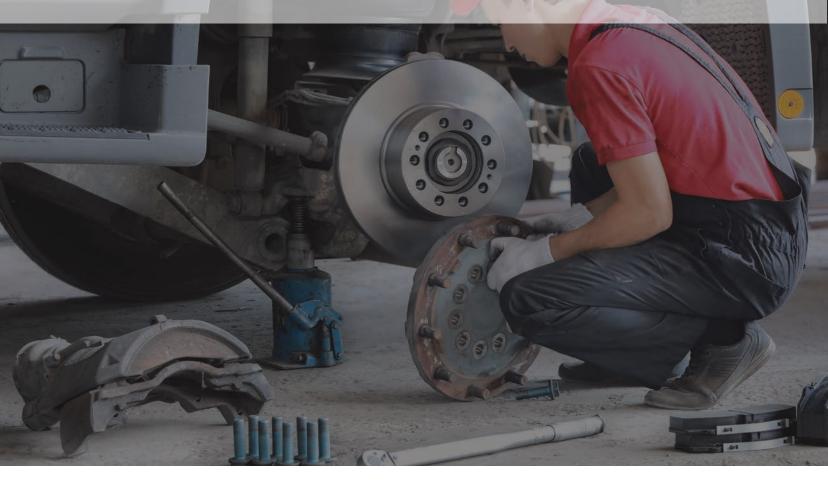

The LA (Little Anthony) Series is a classic liftgate designed for use on service bodies and dry vans. It features direct hydraulic drive, a built-in step, standard tail lights, and a recessed toggle switch, plus all hydraulic components are housed safely within the liftgate body.

LA is a great fit for mobile service and roadside tire repair vehicles.

RECOMMENDED APPLICATIONS

LIGHT/MEDIUM DUTY





KEEP MOVING FORWARDGet your truck back on the road faster with Anthony.

Anthony's parts and service distribution center is located inside a 134,000 square foot dedicated liftgate production facility in Pontiac, IL where every liftgate is built. This central U.S. location, plus on-site fabrication, and extensive part inventory allows a team of committed customer support professionals to ship parts when you need them most.





STANDARD MODELS				
MODEL	LA-66	LA-86		
Capacity (lbs.)	1600	2000		
Overall Width	72"	92"		
Bed Height (Min-Max)	Up to 54"	Up to 54"		
AVAILABLE PLATFORMS				
Aluminum	65" x 41" + 6" ramped	85" x 41" + 6" ramped		
Steel Bar Grate	65" x 27"	85" x 27"		

Optional tire rack available, cart stops available on aluminum platforms For mounting requirements, visit anthonyliftgates.com/mountingrequirements

AC CONVENTIONAL SERIES



The AC conventional liftgate functions similar to the world's first liftgate, invented by Anthony in 1941.

Its platform stows folded upright, doubling as a tail gate when not in use. AC features a grease free design to provide years of smooth operation without the expense of routine lubrication.

It is best suited for stake bed trucks hauling general cargo, such as construction and landscaping vehicles.

RECOMMENDED APPLICATIONS

MEDIUM/HEAVY DUTY



LOW PRESSURE HYDRAULICS Anthony liftgates are designed to run at low pressure, which puts less

Anthony liftgates are designed to run at low pressure, which puts less strain on hoses, fittings, cylinders, and power units, extending the life of the entire hydraulic system.

Also, every cylinder on an Anthony liftgate is designed to pull when lifting, and to stow in the retracted position in transit. This helps guard the cylinder rods from pitting and corrosion that can prematurely damage seals and lead to shorter cylinder life.





KEY ADVANTAGES

- Platform Doubles as Tailgate Heavy duty Transit Latch Grease Free

- Stainless Steel Pump Box



CONVENTIONAL MODELS				
MODEL	AC-1600	AC-2000	AC-2500	
Capacity (lbs.)	1600	2000	2500	
Bed Height (Min-Max)	36" - 57"	36" - 57"	36" - 57"	
AVAILABLE PLATFORMS				
Steel 72" x 36" + 6"				
Steel 84" x 36" + 6"				
Steel 90" x 36" + 6"				

Aluminum platforms available by request

For mounting requirements, visit anthonyliftgates.com/mountingrequirements



LIFT GATE

ANTHONY

LIFT GATE®


America's most complete line of hydraulically-powered tail-gates




4-WAY POWER

TO
REDUCE
YOUR
TRUCKING
COSTS













POWER OPENING







. . . all with one handy lever, one hydraulic cylinder

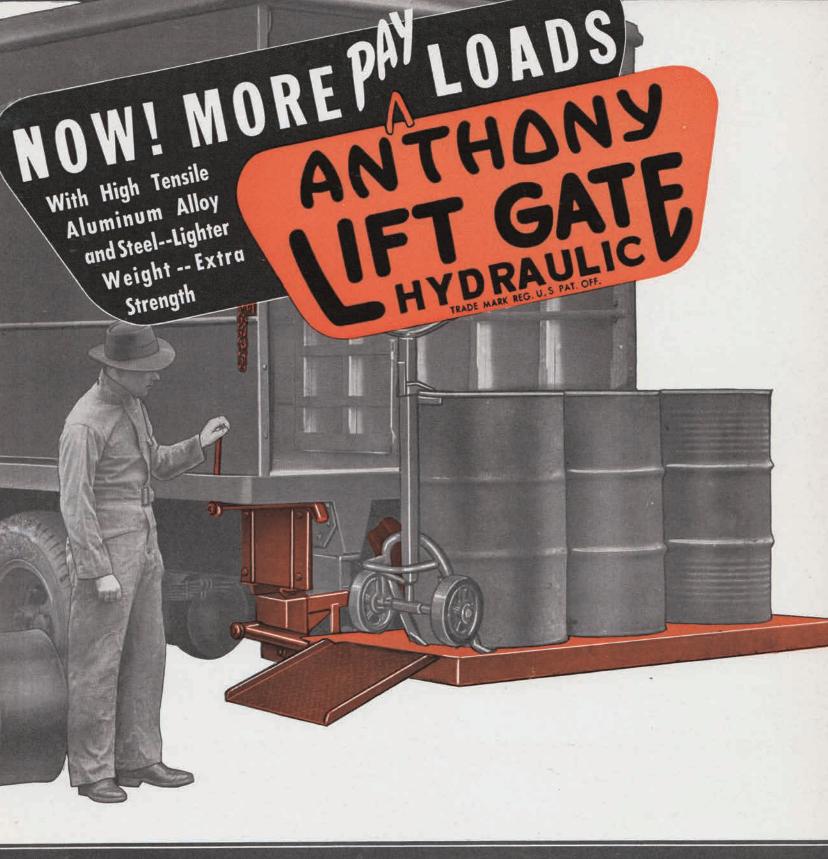

GIVES A LIFT TO TRUCKING PROFITS

POWER OR "SPRING" CLOSING WITH OR WITHOUT PERMANENT RAMP



1037 W. Howard Street • PO Box 615 • Pontiac, IL 61764 Ph. (815) 842.3383 • Fax. (815) 844.3612 • Toll Free. (800) 482.0003 www.anthonyliftgates.com